

F16-1

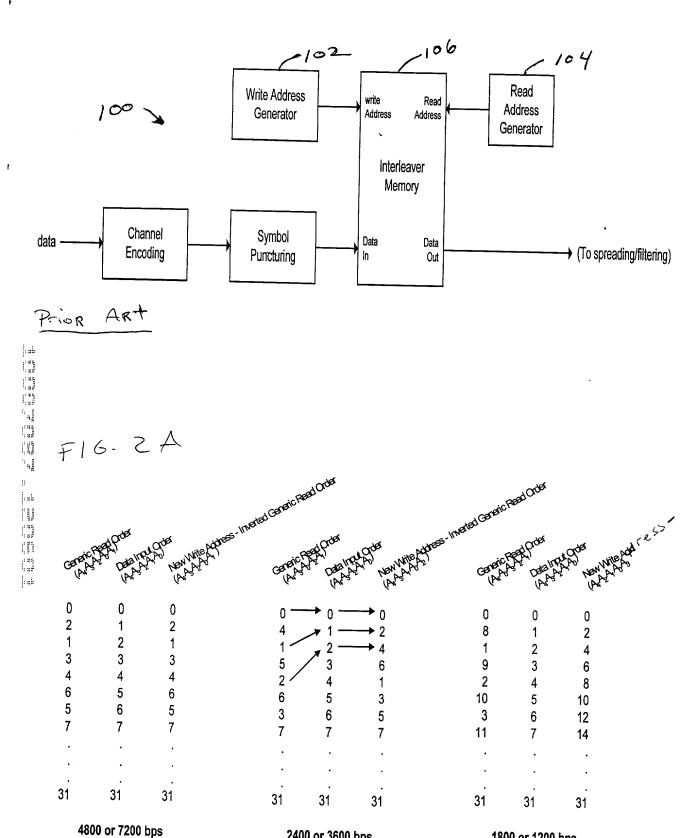


2400 or 3600 bps


1800 or 1200 bps


F16. 2B

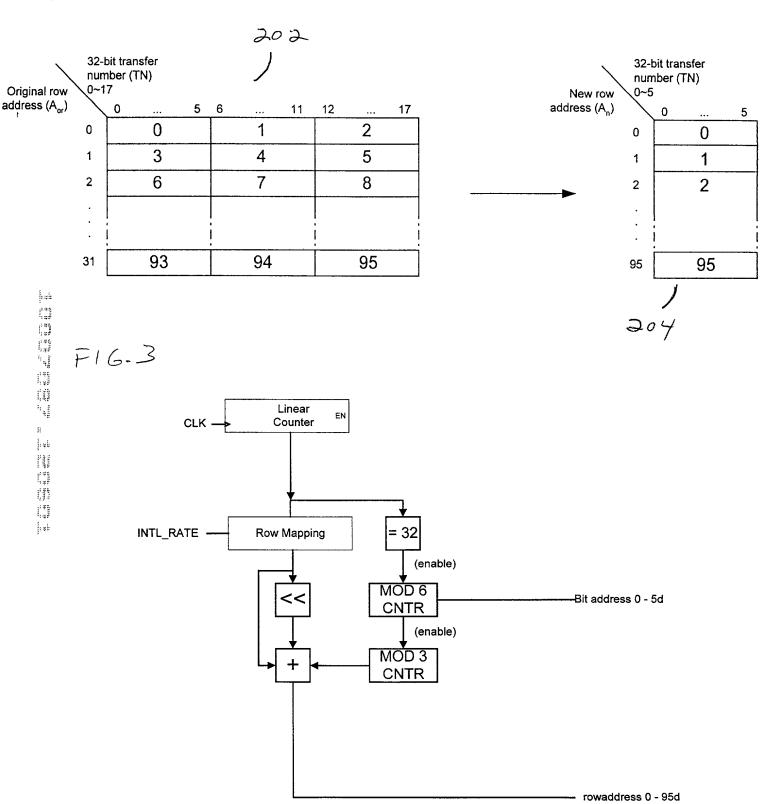

F16.4

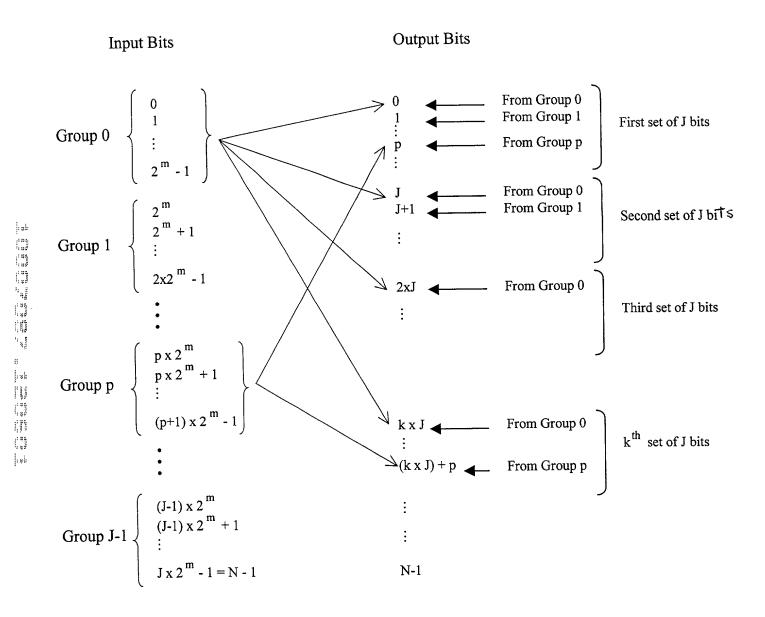

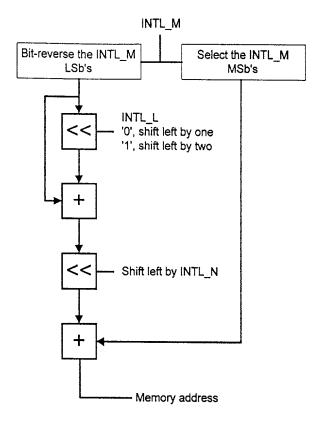


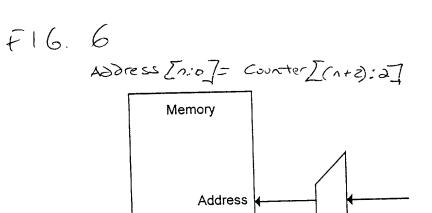

Range select

PN Index or simple counter chain tied to reverse link frame timing.

F16-7

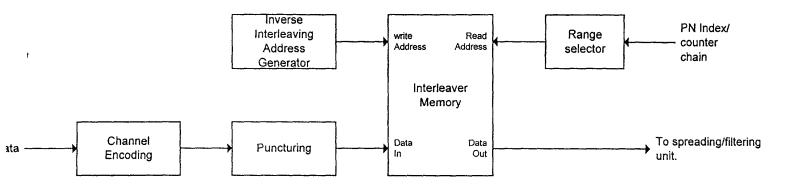

The state of the s